


5,08 mm RAIL TYPE LAYERED SOCKET TERMINAL



Production Code : RTKSK 5,08-2x8

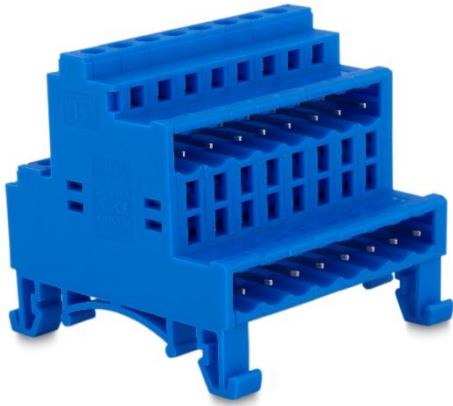

Rail type 5,08 mm pin ranged socket terminal block is suitable for;
In systems instead of socketed rail terminal block,
Multi-cable distribution in panels in automation systems,
In all systems where multiple distribution is required.

TECHNICAL DATA

DIMENSIONS

| | |
|---------------|----------|
| Width | 44,84 mm |
| Height | 44,00 mm |
| Depth | 45,00 mm |
| Pin range | 5,08 mm |
| Pin thickness | 1x1 mm |

TECHNICAL DATA

| | |
|---------------------|----------------------------|
| Current | 16 A |
| Voltage | 250 V |
| Cable cross section | 0,25 – 2,5 mm ² |
| Cable stripping | 7 mm |
| Screw size | M3 |
| Nominal torque | 0,25 Nm |
| Flammability rating | V0 |
| Coating of metals | μ3+AG |

GENERAL ORDERING DATA

| | |
|-------------------|---|
| Type | 5,08 mm Rail Type Layered Socket Terminal Pin 8 |
| Qty | 25 pcs |
| Order no | 10.678 - 11.678 |
| Package weight | 1,15 kg |
| Packaging | Box |
| Min. Order Qty | 25 pcs |
| Country of origin | TURKEY |

CERTIFICATES


| CERTIFICATE | ISSUED BY |
|-----------------------|---------------|
| TS 10487 EN 60998-2-1 | TSE |
| CE | SZUTEST CO. |
| RoHS | İNTERTEK A.Ş. |
| EAC | SERCONS |



MEGARADAR®

Elektrik Elektronik İnşaat San. Tic. A.Ş.

DRAWINGS

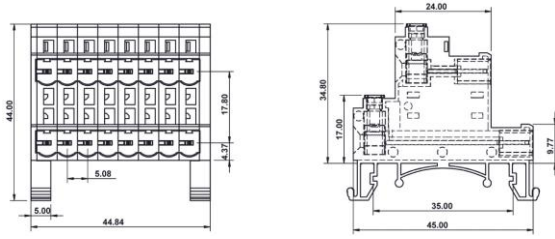

COMBINE PRODUCTS

5,08 mm SBDK-D (10.208)

