

5,08 mm RAIL TYPE LAYERED SOCKET TERMINAL



Production Code : RTKSK 5,08-2x12



Rail type 5,08 mm pin ranged socket terminal block is suitable for;
In systems instead of socketed rail terminal block,
Multi-cable distribution in panels in automation systems,
In all systems where multiple distribution is required.

TECHNICAL DATA

DIMENSIONS

Width	65,16 mm
Height	44,00 mm
Depth	45,00 mm
Pin range	5,08 mm
Pin thickness	1x1 mm

TECHNICAL DATA

Current	16 A
Voltage	250 V
Cable cross section	0,25 – 2,5 mm ²
Cable stripping	7 mm
Screw size	M3
Nominal torque	0,25 Nm
Flammability rating	V0
Coating of metals	μ3+AG

GENERAL ORDERING DATA

Type	5,08 mm Rail Type Layered Socket Terminal Pin 12
Qty	20 pcs
Order no	10.682 - 11.682
Package weight	1,38 kg
Packaging	Box
Min. Order Qty	20 pcs
Country of origin	TURKEY

CERTIFICATES


CERTIFICATE	ISSUED BY
TS 10487 EN 60998-2-1	TSE
CE	SZUTEST CO.
RoHS	İNTERTEK A.Ş.
EAC	SERCONS



MEGARADAR®

Elektrik Elektronik İnşaat San. Tic. A.Ş.

DRAWINGS

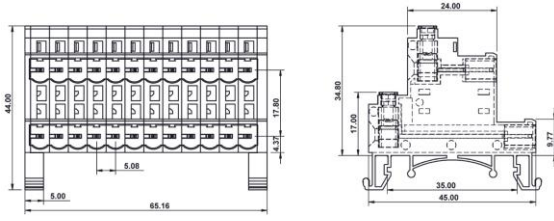

COMBINE PRODUCTS

5,08 mm SBDK-D (10.212)

