

5,08 mm SOCKET PRINTED CIRCUIT TERMINAL– FEMALE



Production Code: 215 SBDK-D



TECHNICAL DATA

DIMENSIONS

| | |
|-------------------|----------|
| Width | 76,08 mm |
| Height | 15,33 mm |
| Depth | 18,15 mm |
| Pin range | 5,08 mm |
| Pin thickness | - |
| Pin hole diameter | - |

TECHNICAL DATA

| | |
|---------------------|----------------------------|
| Current | 16 A |
| Voltage | 250 V |
| Cable cross section | 0,25 – 2,5 mm ² |
| Cable stripping | 7 mm |
| Screw size | M3 |
| Nominal torque | 0,25 Nm |
| Flammability rating | V0 |
| Coating of metals | µ3+AG |

GENERAL ORDERING DATA


| | |
|-------------------|--|
| Type | 5,08 mm Socket Terminal Series Female Pin 15 |
| Qty | 50 pcs |
| Order no | 10.215 - 11.215 - 12.215 13.215 - 14.215 - 15.215 |
| Package weight | 1,3 kg |
| Packaging | Box |
| Min. Order Qty | 50 pcs |
| Country of origin | TURKEY |

*Stock colors are blue and green.

CERTIFICATES


| CERTIFICATE | ISSUED BY |
|-----------------------|---------------|
| TS 10487 EN 60998-2-1 | TSE |
| CE | SZUTEST CO. |
| RoHS | İNTERTEK A.Ş. |
| EAC | SERCONS |

DRAWINGS

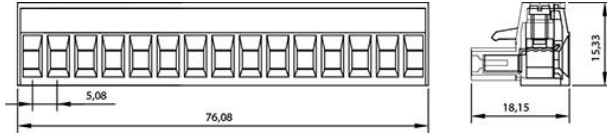

COMBINE PRODUCTS

5,08 mm SBDK-E 90° Open (10.315)



5,08 mm SBDK-E 180° Open (10.365)



5,08 mm SKBK (10.615)

