

## 5,08 mm SOCKET PRINTED CIRCUIT TERMINAL – MALE 180° OPEN



Production Code : 210 SBDK-E2A



### TECHNICAL DATA

#### DIMENSIONS

|                   |          |
|-------------------|----------|
| Width             | 50,68 mm |
| Height            | 12,00 mm |
| Depth             | 8,00 mm  |
| Pin range         | 5,08 mm  |
| Pin thickness     | 1x1 mm   |
| Pin hole diameter | 1,55 mm  |

#### TECHNICAL DATA

|                     |       |
|---------------------|-------|
| Current             | 16 A  |
| Voltage             | 250 V |
| Cable cross section | -     |
| Screw size          | -     |
| Nominal torque      | -     |
| Flammability rating | VO    |
| Coating of metals   | μ3+AG |

### GENERAL ORDERING DATA


|                   |  |
|-------------------|--|
| Type              | 5,08 mm Socket Term.<br>Ser.Male 180°Open Pin10      |
| Qty               | 50 pcs   |
| Order no          | 10.360 - 11.360 - 12.360<br>13.360 - 14.360 - 15.360 |
| Package weight    | 0,21 kg  |
| Packaging         | Box  |
| Min. Order Qty    | 50 pcs   |
| Country of origin | TURKEY   |

\* Stock colors are blue and green.


### CERTIFICATES

| CERTIFICATE           | ISSUED BY     |
|-----------------------|---------------|
| TS 10487 EN 60998-2-1 | TSE           |
| CE                    | SZUTEST CO.   |
| RoHS                  | İNTERTEK A.Ş. |
| EAC                   | SERCONS       |

## DRAWINGS

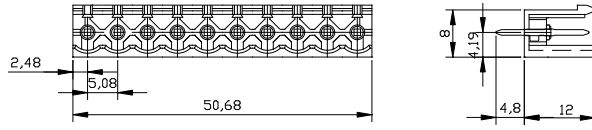

## Diagram



## COMBINE PRODUCTS

### 5,08 mm SBDK-D (10.210)



### 5,08 mm SBDK-DD (10.260)

