

## 5,08 mm RAIL TYPE LAYERED SOCKET TERMINAL



Production Code : RTKSK 5,08-2x5



Rail type 5,08 mm pin ranged socket terminal block is suitable for;  
In systems instead of socketed rail terminal block,  
Multi-cable distribution in panels in automation systems,  
In all systems where multiple distribution is required.

### TECHNICAL DATA

#### DIMENSIONS

Width	29,60 mm
Height	44,00 mm
Depth	45,00 mm
Pin range	5,08 mm
Pin thickness	1x1 mm

### TECHNICAL DATA

Current	16 A
Voltage	250 V
Cable cross section	0,25 – 2,5 mm <sup>2</sup>
Cable stripping	7 mm
Screw size	M3
Nominal torque	0,25 Nm
Flammability rating	V0
Coating of metals	μ3+AG

### GENERAL ORDERING DATA

Type	5,08 mm Rail Type Layered Socket Terminal Pin 5
Qty	40 pcs
Order no	10.675 - 11.675
Package weight	1,15 kg
Packaging	Box
Min. Order Qty	40 pcs
Country of origin	TURKEY

### CERTIFICATES


CERTIFICATE	ISSUED BY
TS 10487 EN 60998-2-1	TSE
CE	SZUTEST CO.
RoHS	İNTERTEK A.Ş.
EAC	SERCONS



**MEGARADAR®**

Elektrik Elektronik İnşaat San. Tic. A.Ş.

## DRAWINGS

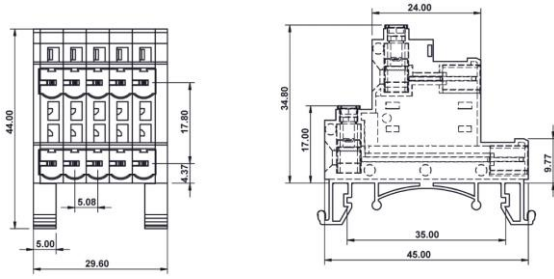

## COMBINE PRODUCTS

**5,08 mm SBDK-D (10.205)**

